

Purge assemblies

HPI PA

High purity purge assemblies

FEATURES:

- Max. inlet pressure 300 bar
- Diaphragm shut off valve
- Made of 316L stainless steel

APPLICATIONS:

- Purge assemblies

TECHNICAL DATA:

Purity	Up to 6.0
Inlet pressure	Max. 300 bar (4350 psig)
Oxygen use	Suitable

MATERIAL SPECIFICATIONS:

Diaphragm (valve)	Hastelloy®* C276
Ports	1/4" NPT(F)
Temperature range	-30°C to +74°C
Leak rate	1x10 ⁻⁸ mbar l/s He
Orifice	Ø 3,2 mm




Straight purge assemblies

Tee purge assemblies



Cross purge assemblies

Models shown with additional accessories to be ordered separately

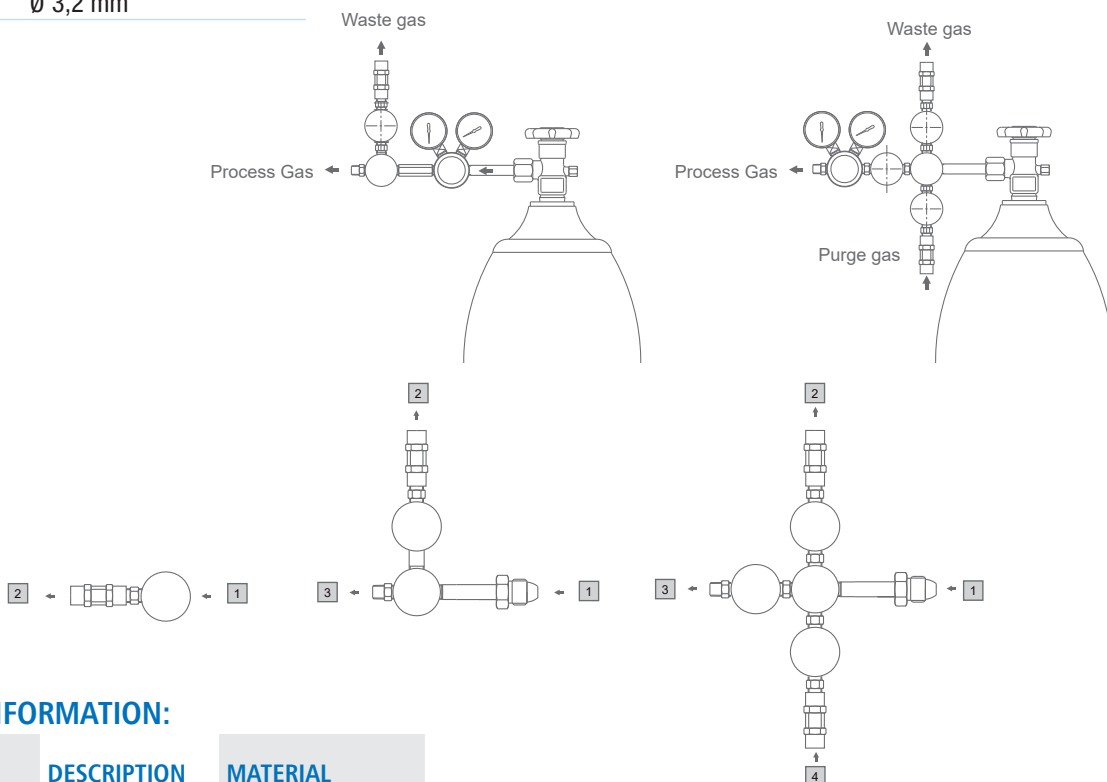

ORDERING INFORMATION:

PART NO.	DESCRIPTION	MATERIAL
9013277	Straight	Stainless steel
9013278	Tee	
9013279	Cross	

For example: 9013277

** Hastelloy® is a registered trademark name of Haynes International, Inc*