

# Line pressure regulator LM51-2

spectro lab



Line pressure regulator LM51-2

## Specifications

- SPECTROLAB-components guarantee maximum quality by using high grade materials and a quality assurance program acc. to ISO 9001.
- All parts in the gas wetted surface area are cleaned in an ultrasonic cleaning system (CFC-free) with the special Cleaning process SPECTRO-CLEAN® and then baked out.
- SPECTROLAB-components undergo a 100% function- and Helium-leak-test.

## Product features

- Brass (chrome plated) line pressure regulator
- For non-corrosive gases and gas mixtures up to quality 6.0
- 2 ports for flexible and individual configuration
- Very stable outlet pressure
- Suitable for inlet pressures up to 300 bar
- Max. outlet pressures 1,5 up to 200 bar \*
- Metal-to-metal seal to atmosphere
- Suitable for ECD-applications
- Pressure regulator can be evacuated
- Inlet filter
- Approved for use with oxygen
- Simple outlet pressure limitation by handwheel
- Easy to install
- New laboratory-style design
- Ergonomically designed



\* 1,5 / 4 bar only for inlet pressure  $\leq$  50 bar

## Technical data

<b>Type</b>	single-stage
<b>Inlet pressure <math>P_1</math></b>	max. 300 bar
<b>Outlet pressure <math>P_2</math></b>	1,5 / 4 bar ( $P_1 \leq 50$ bar) 10 / 20 / 50 / 100 / 200 bar ( $P_1 > 50$ bar)
<b>Materials</b>	
Body regulator:	chrome plated brass
Valve seat:	PA
Diaphragm:	Hastelloy C276
Filter:	Sintered SS 316L
<b>In- and outlets</b>	1/4" NPT-F
<b>Temperature range</b>	-30°C to +60°C
<b>Leak rate (to atmosphere)</b> (via seat)	$1 \times 10^{-8}$ mbar l/s He $1 \times 10^{-6}$ mbar l/s He
<b>Flow capacity</b>	$C_v=0.15$
<b>Weight</b>	1.0 kg

Dimensions  
LM51-2

Side view

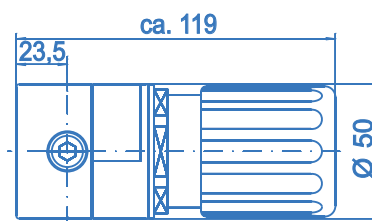

# Line pressure regulator LM51-2



spectron lab

## Ordering information:

Line pressure regulator LM51-2

### In- / outlets

CM 1/4	- 1/8" / 1/4" / 1/2" - OD compression fitting (brass)
CM 6	- 3 / 6 / 8 / 10 / 12 mm compression fitting (brass)
CE 1/4	- 1/8" / 1/4" / 1/2" - OD compression fitting (stainless steel)
CE 6	- 3 / 6 / 8 / 10 / 12 mm compression fitting (stainless steel)
0	- 1/4"-NPT-F (port only)

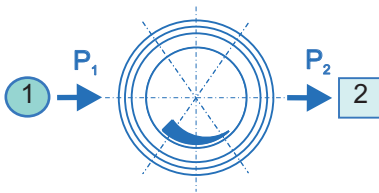

LM51 - 2 - 300 - 10 - 1 - 2 - N2

### Inlet pressure $P_1$

10	- max. 10 bar	100	- max. 100 bar
20	- max. 20 bar	200	- max. 200 bar
50	- max. 50 bar	300	- max. 300 bar

### Outlet pressure $P_2$

1,5	- to 1,5 bar ( $P_1 \leq 50$ bar)
4	- to 4 bar ( $P_1 \leq 50$ bar)
10	- to 10 bar
20	- to 20 bar
50	- to 50 bar
100	- to 100 bar
200	- to 200 bar

### Type of gas

Please specify type of gas (for selection of valve seat materials)

## Ordering example:

LM51-2-300-10-CE6-CE6-N2

