


## Non-Return Valves

### Non Return Valve DCV GED-L/S MED-L/S

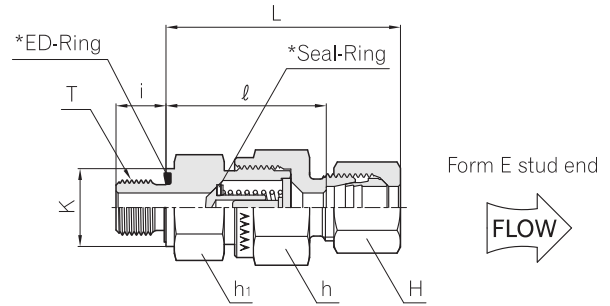

for BSP Paralled

Series	Part No.	Tube O.D.	H	h	h <sub>1</sub>	K	L	l	i	T G(PF)	PN(bar)	
											Steel	SS316
L	DCV01GED-06L	6	14	17	17	14	42.5	28.0	8	1/8	400	250
	DCV02GED-08L	8	17	19	19	19	44.5	30.0	12	1/4	400	250
	DCV02GED-10L	10	19	24	22	19	53.0	38.5	12	1/4	400	250
	DCV03GED-12L	12	22	30	27	22	57.0	42.5	12	3/8	400	250
	DCV04GED-15L	15	27	32	27	27	60.5	45.5	14	1/2	400	250
	DCV04GED-18L	18	32	36	36	27	66.0	50.0	14	1/2	400	160
	DCV06GED-22L	22	36	46	41	32	71.0	53.0	16	3/4	250	160
	DCV08GED-28L	28	41	55	50	40	79.5	63.0	18	1	250	100
	DCV10GED-35L	35	50	60	60	50	90.5	69.0	20	1 1/4	250	100
DCV12GED-42L	42	60	70	65	55	91.0	68.5	22	1 1/2	250	100	
S	DCV02GED-06S	6	17	19	19	19	46.0	31.5	12	1/4	420	400
	DCV02GED-08S	8	19	19	19	19	46.0	31.5	12	1/4	420	400
	DCV03GED-10S	10	22	24	22	22	54.0	38.0	12	3/8	420	400
	DCV03GED-12S	12	24	27	24	22	57.0	41.0	12	3/8	420	400
	DCV04GED-14S	14	27	32	27	27	62.0	44.5	14	1/2	420	315
	DCV04GED-16S	16	30	36	32	27	66.0	48.0	14	1/2	420	315
	DCV06GED-20S	20	36	46	41	32	73.5	52.0	16	3/4	420	250
	DCV08GED-25S	25	46	50	46	40	78.5	54.5	18	1	420	250
	DCV10GED-30S	30	50	60	60	50	90.5	64.0	20	1 1/4	250	250
DCV12GED-38S	38	60	70	65	55	100.0	69.5	22	1 1/2	250	250	

for Metric Paralled

Series	Part No.	Tube O.D.	H	h	h <sub>1</sub>	K	L	l	i	T M(METRIC)	PN(bar)	
											Steel	SS316
L	DCVM10ED-06L	6	14	17	17	14	42.5	28.0	8	M10 x 1.0	400	250
	DCVM12ED-08L	8	17	19	19	17	43.5	30.0	12	M12 x 1.5	400	250
	DCVM14ED-10L	10	19	24	22	19	53.0	38.5	12	M14 x 1.5	400	250
	DCVM16ED-12L	12	22	30	27	22	57.0	42.5	12	M16 x 1.5	400	250
	DCVM18ED-15L	15	27	32	27	24	60.5	45.5	12	M18 x 1.5	400	250
	DCVM22ED-18L	18	32	36	36	27	66.0	50.0	14	M22 x 1.5	400	160
	DCVM26ED-22L	22	36	46	41	32	71.0	55.0	16	M26 x 1.5	250	160
	DCVM33ED-28L	28	41	55	50	40	79.5	63.0	18	M33 x 2.0	250	100
	DCVM42ED-35L	35	50	60	60	50	90.5	69.0	20	M42 x 2.0	250	100
DCVM48ED-42L	42	60	70	65	55	91.0	67.5	22	M48 x 2.0	250	100	
S	DCVM12ED-06S	6	17	19	19	17	46.0	31.5	12	M12 x 1.5	420	400
	DCVM14ED-08S	8	19	19	19	19	46.0	31.5	12	M14 x 1.5	420	400
	DCVM16ED-10S	10	22	24	22	22	54.0	38.0	12	M16 x 1.5	420	400
	DCVM18ED-12S	12	24	27	24	24	57.0	41.0	12	M18 x 1.5	420	400
	DCVM20ED-14S	14	27	32	27	26	62.0	44.5	14	M20 x 1.5	420	315
	DCVM22ED-16S	16	30	36	32	27	66.0	48.0	14	M22 x 1.5	420	315
	DCVM27ED-20S	20	36	46	41	32	73.5	52.0	16	M27 x 2.0	420	250
	DCVM33ED-25S	25	46	50	46	40	78.5	54.5	18	M33 x 2.0	420	250
	DCVM42ED-30S	30	50	60	60	50	90.5	64.0	20	M42 x 2.0	250	250
DCVM48ED-38S	38	60	70	65	55	100.0	69.5	22	M48 x 2.0	250	250	

Dimensions are given for approximate length with tightened nut. All dimensions are in millimeters for reference only, subject to change.

\*The standard Seal-Ring material is FPM(e.g. Viton®) however NBR(e.g. perbunan®) is also available on request (See Page 3).

\*The standard ED-Ring material is NBR(e.g. perbunan®) however FPM(e.g. Viton®) is also available on Request (See Page3).