


Female Connector(BSP Paralled / Metric Paralled)

DFC-G/M

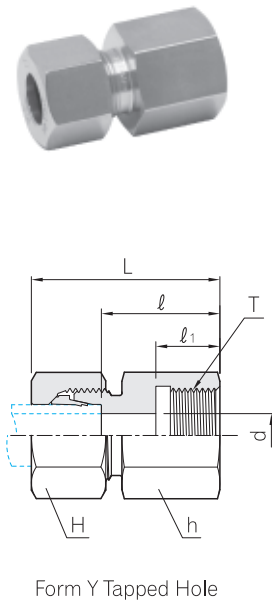

for BSP Paralled

Series	Part No.	Tube O.D.	d	H	h	L	l	l ₁	T G(PF)	PN(bar)		
										C.Steel	SS316	BRASS
L	DFC 06L - 01G	6	4	14	14	34	19.0	12.0	1/8	315	315	200
	DFC 08L - 02G	8	6	17	19	39	24.0	17.0	1/4	315	315	200
	DFC 08L - 03G	8	6	17	24	40	25.0	17.0	3/8	315	315	200
	DFC 08L - 04G	8	6	17	27	44	29.0	20.0	1/2	315	315	200
	DFC 10L - 02G	10	8	19	19	40	25.0	17.0	1/4	315	315	200
	DFC 10L - 03G	10	8	19	24	41	26.0	17.0	3/8	315	315	200
	DFC 10L - 04G	10	8	19	27	45	30.0	20.0	1/2	315	315	200
	DFC 12L - 03G	12	10	22	24	41	26.0	17.0	3/8	315	315	200
	DFC 12L - 04G	12	10	22	27	45	30.0	20.0	1/2	315	315	200
	DFC 15L - 04G	15	12	27	27	46	31.0	20.0	1/2	315	315	200
	DFC 18L - 04G	18	15	32	27	47	30.5	20.0	1/2	315	315	200
	DFC 22L - 06G	22	19	36	36	52	35.5	22.0	3/4	160	160	100
	DFC 28L - 08G	28	24	41	41	55	38.0	24.5	1	160	160	100
	DFC 35L - 10G	35	30	50	55	63	41.0	26.5	1 1/4	160	160	100
DFC 42L - 12G	42	36	60	60	65	42.5	28.5	1 1/2	160	160	100	
S	DFC 06S - 02G	6	4	17	19	41	26.0	17.0	1/4	400	400	
	DFC 08S - 02G	8	5	19	19	41	26.0	17.0	1/4	400	400	
	DFC 10S - 03G	10	7	22	24	43	26.5	17.0	3/8	400	400	
	DFC 12S - 03G	12	8	24	24	43	26.5	17.0	3/8	400	400	
	DFC 14S - 04G	14	10	27	30	50	32.0	20.0	1/2	400	400	
	DFC 16S - 04G	16	12	30	30	50	31.5	20.0	1/2	400	400	
	DFC 20S - 06G	20	16	36	36	56	34.5	22.0	3/4	315	315	
	DFC 25S - 08G	25	20	46	41	62	37.5	24.5	1	315	315	
	DFC 30S - 10G	30	25	50	55	69	42.0	26.5	1 1/4	315	315	
	DFC 38S - 12G	38	32	60	60	74	43.5	28.5	1 1/2	250	250	

for Metric Paralled

Series	Part No.	Tube O.D.	d	H	h	L	l	l ₁	T M(Metric)	PN(bar)	
										C.Steel	SS316
L	DFC 06L - M10	6	4	14	14	34	19.5	12.5	M 10 x 1	315	315
	DFC 08L - M12	8	6	17	17	39	24.0	17.0	M 12 x 1.5	315	315
	DFC 10L - M14	10	8	19	19	40	25.0	17.0	M 14 x 1.5	315	315
	DFC 12L - M16	12	10	22	22	41	26.0	17.0	M 16 x 1.5	315	315
	DFC 15L - M18	15	12	27	24	43	28.0	17.0	M 18 x 1.5	315	315
	DFC 18L - M22	18	15	32	30	46	29.5	19.0	M 22 x 1.5	315	315
	DFC 22L - M26	22	19	36	32	51	34.5	21.0	M 26 x 1.5	160	160
	DFC 28L - M33	28	24	41	41	54	37.5	24.0	M 33 x 2	160	160
	DFC 35L - M42	35	30	50	55	62	40.5	26.0	M 42 x 2	160	160
	DFC 42L - M48	42	36	60	60	65	42.0	28.0	M 48 x 2	160	160
S	DFC 06S - M12	6	4	17	17	41	26.0	17.0	M 12 x 1.5	400	400
	DFC 08S - M14	8	5	19	19	41	26.0	17.0	M 14 x 1.5	400	400
	DFC 10S - M16	10	7	22	22	43	26.5	17.0	M 16 x 1.5	400	400
	DFC 12S - M18	12	8	24	24	44	27.5	17.0	M 18 x 1.5	400	400
	DFC 14S - M20	14	10	27	27	49	31.0	19.0	M 20 x 1.5	400	400
	DFC 16S - M22	16	12	30	30	49	30.5	19.0	M 22 x 1.5	400	400
	DFC 20S - M27	20	16	36	36	56	34.5	22.0	M 27 x 2	315	315
	DFC 25S - M33	25	20	46	41	61	37.0	24.0	M 33 x 2	315	315
	DFC 30S - M42	30	25	50	55	68	41.5	26.0	M 42 x 2	315	315
	DFC 38S - M48	38	32	60	60	74	43.0	28.0	M 48 x 2	250	250

Dimensions are given for approximate length with tightened nut. All dimensions are in millimeters for reference only, subject to change.