


Hy-Lok ZCO O-Ring Face Seal Fittings

Tee


Connects ZCO glands.

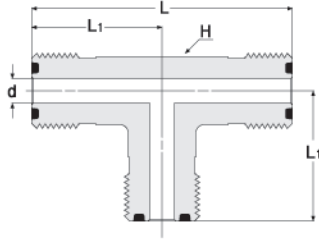

Part Number	ZCO Size in	d	L	L ₁	H Wrench Flat	Working Pressure	
		in. (mm)				psig	bar
H-ZCOTA - 4	1/4	0.18 (4.57)	1.92 (48.79)	0.96 (24.38)	1/2"	14300	980
H-ZCOTA - 8	1/2	0.40 (10.16)	2.52 (64.00)	1.26 (32.00)	13/16"	11100	760
H-ZCOTA - 12	3/4	0.62 (15.75)	2.96 (75.18)	1.48 (37.59)	1-1/4"	10900	750
H-ZCOTA - 16	1	0.87 (22.10)	3.12 (79.25)	1.56 (39.62)	1-11/16"	8800	600

Plugs


Seals a ZCO gland and female nut.



Part Number	ZCO Size in	L	L ₁	H Hex Flat
		in. (mm)		
H-ZCOP - 4	1/4	0.77(19.56)	0.47(11.94)	5/8"
H-ZCOP - 8	1/2	0.89(22.61)	0.56(14.22)	15/16"
H-ZCOP - 12	3/4	0.99(25.15)	0.56(14.22)	1-5/16"
H-ZCOP - 16	1	1.02(25.91)	0.56(14.22)	1-5/8"

Swivel Male Connector


Converts female NPT thread to ZCO O-ring face seal.

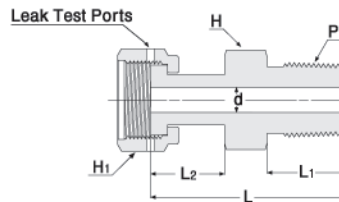

Part Number	ZCO Size in	P Male NPT	d	L	L ₁	L ₂	H Hex Flat	H ₁ Hex Flat	Working Pressure	
			in. (mm)						psig	bar
H-ZCOSMC 4- 4N	1/4	1/4"	0.18(4.57)	1.59(40.39)	0.56(14.22)	0.72(18.29)	9/16"	11/16"	9800	670
H-ZCOSMC 8- 6N	1/2	3/8"	0.40(10.16)	1.67(42.42)	0.56(14.22)	0.78(19.81)	11/16"	1"	5600	380
H-ZCOSMC 8- 8N	1/2	1/2"	0.40(10.16)	1.87(47.50)	0.75(19.05)	0.79(20.07)	7/8"	1"	5600	380
H-ZCOSMC12-12N	3/4	3/4"	0.62(15.75)	2.03(51.56)	0.75(19.05)	0.94(23.88)	1-1/16"	1-1/2"	3900	260
H-ZCOSMC16-16N	1	1"	0.87(22.10)	2.36(59.94)	0.94(23.88)	0.98(24.89)	1-3/8"	1-3/4"	2900	190

Swivel SAE/MS Connector

Converts SAE/MS straight thread boss to ZCO O-ring face seal.

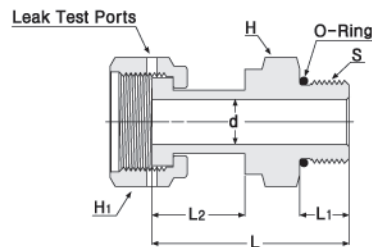

Part Number	ZCO Size in	S Straight Thread Size	d	L	L ₁	L ₂	H Hex Flat	H ₁ Hex Flat	O-ring Uniform size Number	Working Pressure	
			in. (mm)							psig	bar
H-ZCOSSC 4- 4U	1/4	7/16-20	0.18(4.57)	1.54(39.12)	0.36(9.14)	0.77(19.56)	9/16"	11/16"	-904	4500	310
H-ZCOSSC 8- 6U	1/2	9/16-18	0.40(10.16)	1.64(41.66)	0.39(9.91)	0.81(20.57)	11/16"	1"	-906	4500	310
H-ZCOSSC 8- 8U	1/2	3/4-16	0.40(10.16)	1.71(43.43)	0.44(11.18)	0.81(20.57)	7/8"	1"	-908	4500	310
H-ZCOSSC12-12U	3/4	1-1/16-12	0.62(15.75)	2.07(52.58)	0.59(14.99)	0.94(23.88)	1-1/4"	1-1/2"	-912	3600	240
H-ZCOSSC16-16U	1	1-5/16-12	0.87(22.10)	2.17(55.12)	0.59(14.99)	0.98(24.89)	1-1/2"	1-3/4"	-916	2900	190